

# R290 Hi--mbask

Integrated Heat Pump Hot Water System



Find out more at www.greeac.com.au




R290 Eco-friendly Refrigerant

R290, a natural refrigerant with a GWP of 3, significantly cuts carbon emissions and avoids ozone depletion, offering an eco-friendly alternative to high-GWP refrigerants.

290

Less Refrigerant Used

Charge volume is reduced by 67% compared with conventional refrigerant

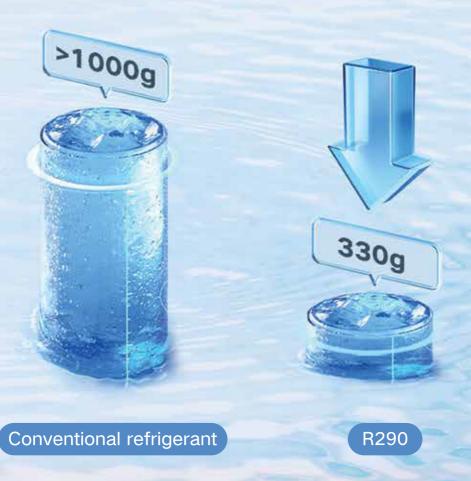

## **ENERGY-SAVING**

 Compressor Dedicated for **R290 Heat Pump** 

The compressor features a 40% more compact design, equipped with:

- A high-efficiency permanent-magnet motor
- V-shaped magnetic flux concentration technology
- Lightweight rotor construction
- Optimized low-torque-ripple design
- Additionally, the surface rigidity has been tripled through advanced adamas coating.





■ Fast Heating ■ Accurate Water Temperature Low noise

Automactically adjust the operating frequency of the compressor and the rotating speed of the fan motor according to the change of the water temperature

#### Dedicated Micro-channel Heat Exchanger

It adopts the special design of channels which intensified the heat transfer effect in refrigerant process. Comprehensive heat transfer performance is improved by





The cold water at the bottom of the water tank is fully heated by the bottom subcooling heat exchange to obtain better energy saving and water usability.

#### • Self-Adaptive Inverter Compressor

#### Realizing the optimal COP

Compared with the water heater adopting ordinary fixed-speed compressor, it is more energy-efficient.

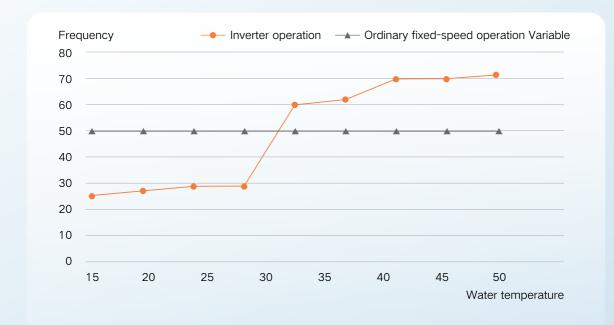

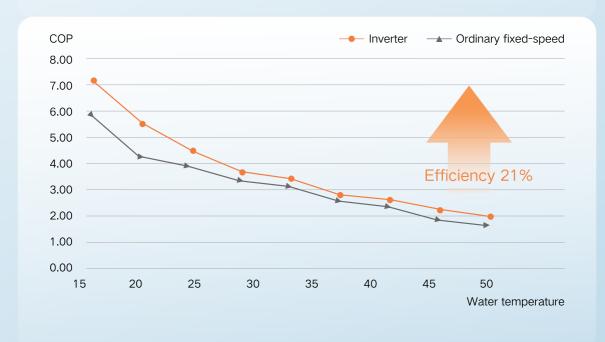

#### • Intelligent Energy-Saving

Thanks to self-learning and self-forecasting functions, the intelligent operation is more energy-saving.

Learn	Analysis	Forecast	Operation

# RELIABLE

#### Crystal Titanium in Blue Enamel Tank

- Enamel layer, adherence layer and superior carbon steel layer.
- Three layers are more reliable for corrosion resistance, and more secure to use.





kg/cm<sup>2</sup>
High anti-pressure ability



Acid-resisting and anti-corrosion test







Superior
Adherence carbon steel layer layer

#### • Double Anti-explosion Design

 Anti-explosion design for potential ignition source  Isolated design of electrical control and refrigerant pipeline



Relay sealing device



Sealed electrical control parts



Thermostat non-incendive component



Compressor and refrigerant pipeline components



- Refined Control of Refrigerant Flow
- Wide adjustment range, suitable for wider ambient temperature and water temperature
- Electronic adjustment with sensitive reaction

#### Gree 4-way Reversing Valve for Defrosting

- Conduct defrosting automatically according to the thickness of frost in the evaporator
- Quick and thorough defrosting



# CONVENIENT

Enjoy Convenient and Comfortable Life

- Easy Installation
- Smart Wired Control
- Intelligent App Control







Electric anode rod for preventing corrosion



Dry fire protection









Insulated water tank



Automatic temperature control



**Grounding protection** 



**Automatic error detection** 











Overpressure protection



Waterproof and anti-backflow protection

# **SPECS**

#### • H Series

Model	GRS-2.3Pd/TD200ANpH-K	GRS-2.3Pd/TD270ANpH-K
Rated water storage capacity	206L	270L
Heat pump heating capacity	2300W	2300W
Heat pump rated input power	426W	426W
сор	5.41W/W	5.46W/W
Electric heater input power	2000W	2000W
Maximum input power (Heat pump + Electric heater)	830W+2000W	830W+2000W
Power supply	220-240V ~ 50Hz	220-240V ~ 50Hz
Water outlet temperature	35°C~70°C	35°C~70°C
Heat pump operating range	-7~45°C	-7~45°C
Inlet/Outlet connector diameter	DN15	DN15
Water-proof grade	IPX4	IPX4
Refrigerant	R290 (330g)	R290 (330g)
Sound pressure level	44dB(A)	44dB(A)
Dimension (W×D×H)	663mm × 670mm × 1643mm	663mm × 670mm × 1924mm
Net weight	97kg	109kg

#### • B Series

Model	GRS-2.3Pd/TD200ANpB-K	GRS-2.3Pd/TD270ANpB-K
Rated water storage capacity	206L	270L
Heat pump heating capacity	2300W	2300W
Heat pump rated input power	426W	426W
сор	5.41W/W	5.46W/W
Electric heater input power	2000W	2000W
Maximum input power (Heat pump + Electric heater)	830W+2000W	830W+2000W
Power supply	220-240V ~ 50Hz	220-240V ~ 50Hz
Water outlet temperature	35°C~70°C	35°C~70°C
Heat pump operating range	-7~45°C	-7~45°C
Inlet/Outlet connector diameter	DN15	DN15
Water-proof grade	IPX4	IPX4
Refrigerant	R290 (330g)	R290 (330g)
Sound pressure level	44dB(A)	44dB(A)
Dimension (W×D×H)	663mm × 670mm × 1643mm	663mm × 670mm × 1924mm
Net weight	97kg	109kg

#### NOTES:

Product conforms to AS 3498:2020 and AS/NZS 2712:2007.

Test conditions: Outdoor ambient temperature 20/15°C (DB/WB); Water temperature from 10°C up to 55°C.

Under BOOST Mode, electric heater helps to heat water.

Data is subject to change for contiual improvement without prior notice.

# GO FOR HEAT PUMP WATER HEATER SUPPORTED BY GOVERNMENT INCENTIVES

 Federal Small-Scale Technology Certificate (STC's) entitlements for 2025

When a heat pump water heater is purchased, as high as an amount of Small-scale Technology Certificates (STCs) will be received, and these STCs can be used to discount the purchase price.

STC 2025\*

Efective from 1 Jan 2025 to 31 Dec 2025

Product Series	Product Model	Zone 1	Zone 2	Zone 3	Zone 4
Н	200L	27	28	33	36
Н	270L	28	28	34	37



VEL.

 In addition to the Federal STC rebates, State rebates are also available in same states to replace water heating systems with efficient ones such as heat pump water heater

**01** The Victorian government provides VEECs to households in Victoria who are replacing eletric water heater with heat pump water heater, and to businesses in Victoria who are replacing gas/electric water heater or new installation with heat pump water heater.

# Household Application

#### VEU 2025\*

Effective from 1 Feb 2025 to 31 Jan 2026

State	Product Series	Activity	Zone 4 206L/270L Metropolitan	Zone 5 206L/270L Metropolitan	Zone 4 206L/270L Regional	Zone 5 206L/270L Regional
VIC	Н	1D	13	13	14	14
VIC	Н	3C	9/8	8	9/8	8
VIC	В	1D	12/11	12/11	13/12	12
VIC	В	3C	7	7/6	7	7/6

## **Business Application**

#### VEU 2025\*

Effective from 1 Feb 2025 to 31 Jan 2026

State	Product Series	Activity	Zone 4 206L/270L Metropolitan	Zone 5 206L/270L Metropolitan	Zone 4 206L/270L Regional	Zone 5 206L/270L Regional
VIC	В	44(i) Gas	22	19	20/19	17
VIC	В	44(ii) Electric	63/62	58/57	67/66	62/61
VIC	В	44(iii) New	18/17	15	16/15	13

**02** The NSW Energy Savings Scheme (ESS) provides financial incentives to install heat pump water heater in NSW households for replacing electric water heater, and businesses for replacing gas/electric water heater or new installation.



# Household Application

#### ESS 2025\*

Effective from 1 Jan 2025 to 31 Dec 2025

State	Product Series	Activity	Zone 3 206L/270L Metropolitan	Zone 5 206L/270L Metropolitan	Zone 3 206L/270L Regional	Zone 5 206L/270L Regional
NSW	Н	D17	28	30	29	31
NSW	Н	D19	14	15	14	15
NSW	В	D17	25	27	26	28
NSW	В	D19	11	12/11	11/10	12/11

# **Business Application**

#### ESS 2025\*

Effective from 1 Jan 2025 to 31 Dec 2025

PRCs\*

State	Product Series	Activity	Zone 3 206L/270L Metropolitan	Zone 5 206L/270L Metropolitan	Zone 3 206L/270L Regional	Zone 5 206L/270L Regional	Zone 3 206L/270L	Zone 5 206L/270L
NSW	В	F16 Gas	40/41	31	38	29	1	1
NSW	В	F16 Electric	137/135	115/113	141/139	119/117	1	1
NSW	В	F16 New	31/32	23	29	21	1	1
NSW	В	WH1	/	/	1	1	964/949	823/809

<sup>\*</sup> Terms & conditions apply - contact us for more details

#### Welcome to visit/follow

#### **Gree Global Platform**



















#### Note:

Gree is committed to continuously improving its products to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

All features and specifications are subject to change without prior notice.

All images provided in this catalogue are used for illustration purposes only. Copyright® Gree Electric Appliances, Inc. of Zhuhai. All rights reserved.

GC-2505-03

For Parts and Warranty:

